
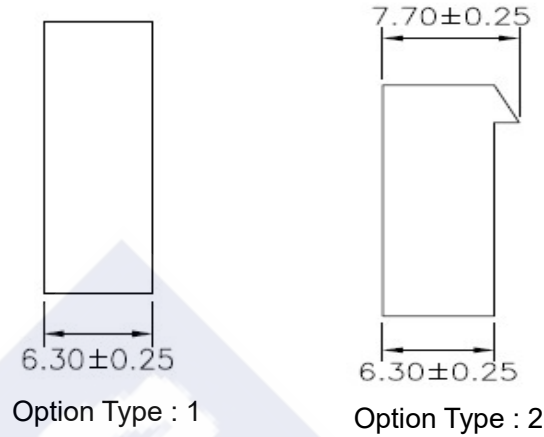


RoHS

Reach

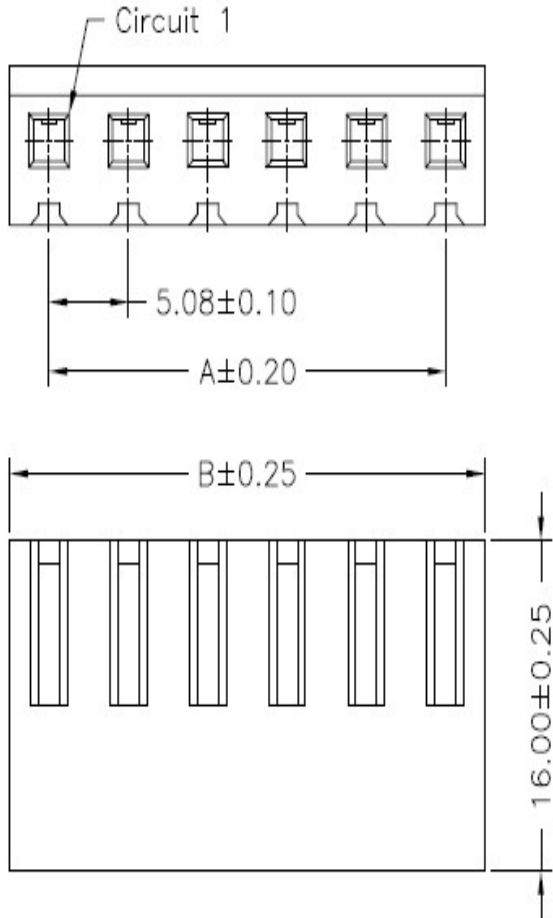

Explanation of PN.

5081J H X XX - X XX

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Housing
- ③ Option Type : 1 : Without the protrusion
2 : With the protrusion
- ④ Circuits No.
- ⑤ Insulator Material : 2 : Nylon66, UL 94-V2
3 : Nylon66, UL 94-V0
7 : Nylon66, UL 94-V2(No Flame)
- ⑥ Color : NL : Natural (Translucent) -- Nylon66, UL 94-V2
WH : White -- Nylon66, UL 94-V0
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)

Ordering Information & Dimension

Circuits No.	Dimensions		Circuits No.	Dimensions		Circuits No.	Dimensions	
	A	B		A	B		A	B
02	5.08	10.08	09	40.64	45.64	16	76.20	81.20
03	10.16	15.16	10	45.72	50.72	17	81.28	86.28
04	15.24	20.24	11	50.80	55.80	18	86.36	91.36
05	20.32	25.32	12	55.88	60.88	19	91.44	96.44
06	25.40	30.40	13	60.96	65.96	20	96.52	101.52
07	30.48	35.48	14	66.04	71.04			
08	35.56	40.56	15	71.12	76.12			

Specification :

- Current Rating : 7A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Insulator Material : Nylon66, UL 94-V2 or Nylon66, UL 94-V0 or Nylon66, UL 94-V2 (No Flame)



DESCRIPTION :
**5.08mm Pitch,
 Housing, Single Row,**
 PART NO. :
5081JHXXX-XXX

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

