
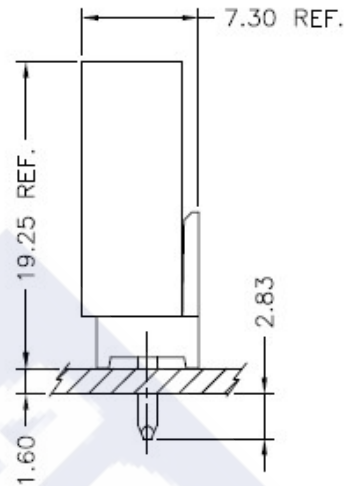
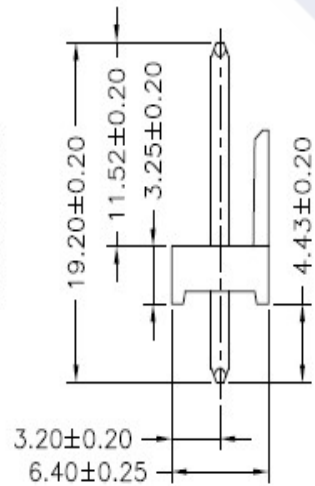
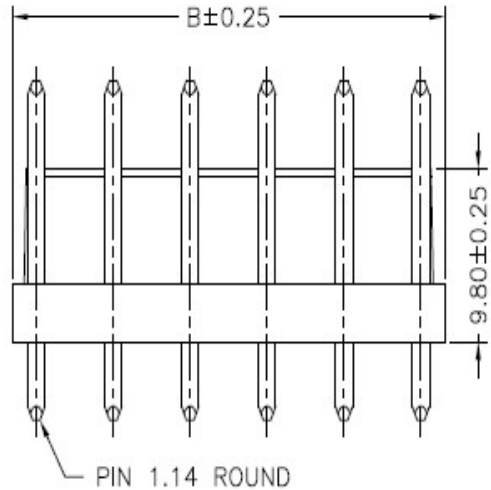



RoHS

Reach

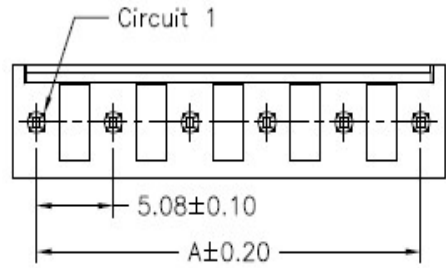

Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02	5.08	8.20	10	45.72	48.84
03	10.16	13.28	11	50.80	53.92
04	15.24	18.36	12	55.88	59.00
05	20.32	23.44	13	60.96	64.08
06	25.40	28.52	14	66.04	69.16
07	30.48	33.60	15	71.12	74.24
08	35.56	38.68	16	76.20	79.32
09	40.64	43.76	17	81.28	84.40

Explanation of PN.


**5081J V B XX - X NL 0**

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : B Type
- ④ Circuits No.
- ⑤ Insulator Material : 2 : Nylon66, UL 94-V2  
7 : Nylon66, UL 94-V2(No Flame)
- ⑥ Color : NL : Natural (Translucent) -- Nylon66, UL 94-V2  
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)
- ⑦ Contact Plating : Tin-plated,

Specification :

- Current Rating : 7A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon66, UL 94-V2 or Nylon66, UL 94-V2(No Flame)

	<b>DESCRIPTION :</b> 5.08mm Pitch, Receptacle, Single Row, DIP, Straight Angle, A Type	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 5081JVBXX-XNL0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  