

RoHS

Reach



Ordering Information & Dimension

Explanation of PN.

6350J V X T XX - X XX 0



① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : M : M Type Pin ; F : F Type Pin
- ④ Row Type : triple Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 2: Nylon66, UL 94-V2
3: Nylon66, UL 94-V0
- ⑦ Color : NL: Natural(Translucent)(Nylon66, UL 94-V2)
WH: Natural(White)(Nylon66, UL 94-V0)
- ⑧ Contact Plating : Tin-plated

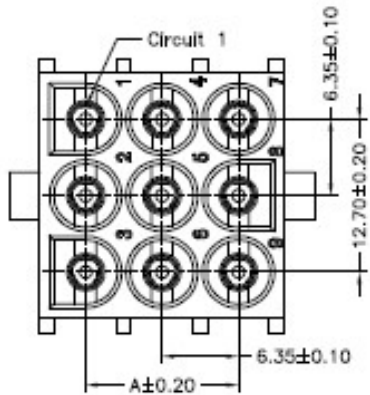


P.C.B LAYOUT

Circuit NO.	Dimensions	
	A	B
06	6.35	13.97
09	12.70	20.32
12	19.05	26.67
15	25.40	33.02

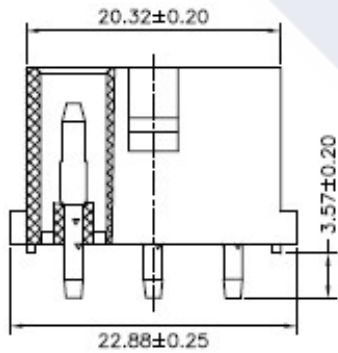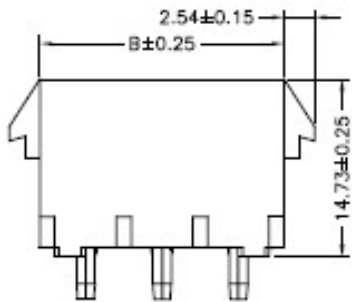

M : M Type Pin



F : F Type Pin

Specification :

Current Rating : 15A AC,DC

Voltage Rating : 600V AC,DC

Temperature Range : -25°C ~ +85°C


Contact Resistance : 3.5mΩ Max.


Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 5000V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V2 or Nylon66, UL 94-V0



	DESCRIPTION : 6.35mm Pitch, Receptacle, Triple Row, DIP, Straight Angle	GENERAL TOLERANCE	
	PART NO. : 6350JVXTXX-XXX0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 