

RoHS

Reach

Explanation of PN.

2003J HF XX - 3 WH

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Female Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : White

Ordering Information & Dimension

Circuits No.	Dimensions		
	A	B	C
02	2.00	6.60	4.60
03	4.00	8.60	6.60
04	6.00	10.60	8.60
05	8.00	12.60	10.60
06	10.00	14.60	12.60
07	12.00	16.60	14.60
08	14.00	18.60	16.60
09	16.00	20.60	18.60
10	18.00	22.60	20.60
11	20.00	24.60	22.60
13	24.00	28.60	26.60

Specification :

Current Rating : 2A AC,DC

Voltage Rating : 125V AC,DC



Temperature Range : -25°C ~ +85°C


Contact Resistance : 20mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 500V AC/minute

Insulator Material : Nylon66, UL 94-V0

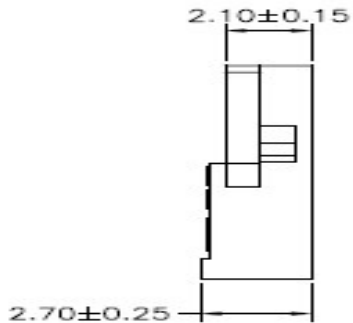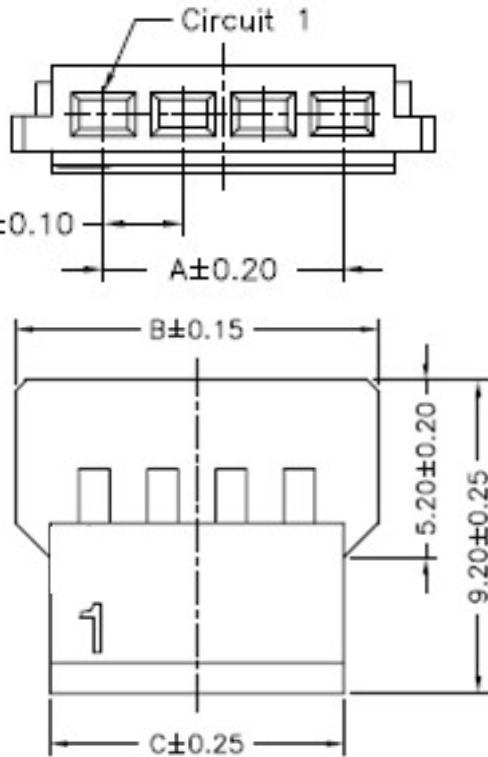

	DESCRIPTION : 2.00mm Pitch, Housing, Single row, Female Type	GENERAL TOLERANCE	
	PART NO. : 2003JHFXX-3WH	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 