

RoHS

Reach

Ordering Information & Dimension

Circuit NO.	Dimensions		Circuit NO.	Dimensions	
	A	B		A	B
02	2.50	6.00	12	27.50	31.00
03	5.00	8.50	13	30.00	33.50
04	7.50	11.00	14	32.50	36.00
05	10.00	13.50	15	35.00	38.50
06	12.50	16.00	16	37.50	41.00
07	15.00	18.50	17	40.00	43.50
08	17.50	21.00	18	42.50	46.00
09	20.00	23.50	19	45.00	48.50
10	22.50	26.00	20	47.50	51.00
11	25.00	28.50			

Explanation of PN.





2504J HF XX - 3 WH

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Female Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : White

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1000V AC/minute
- Insulator Material : Nylon66, UL 94-V0

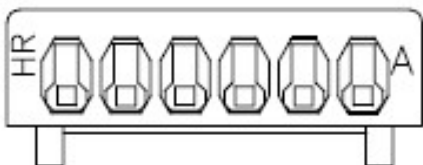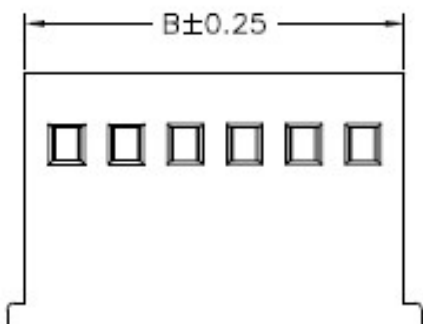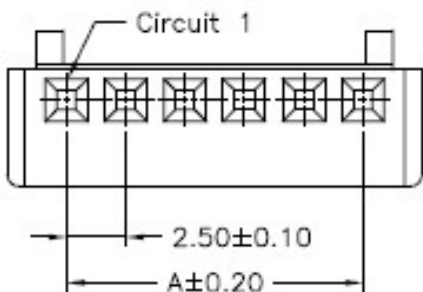

DESCRIPTION :
2.50mm Pitch, Housing,
Single row, Female Type,
Without Mounting Ear

PART NO. :
2504JHFXX-3WH

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

