
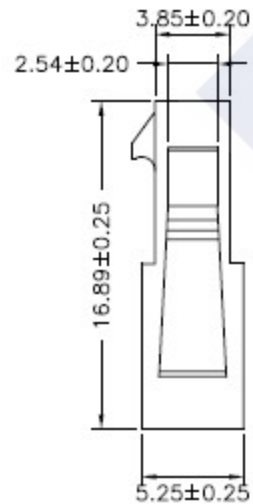


RoHS

Reach

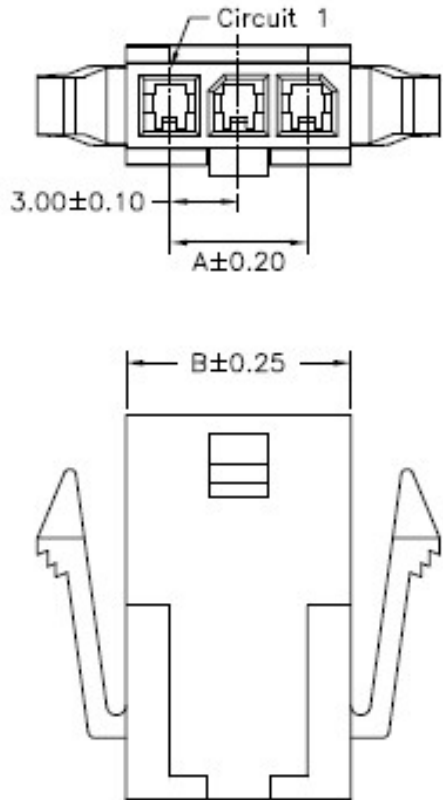

Ordering Information & Dimension

Circuits No.	Dimensions	
	A	B
02	3.00	6.85
03	6.00	9.85
04	9.00	12.85
05	12.00	15.85
06	15.00	18.85
07	18.00	21.85
08	21.00	24.85
09	24.00	27.85
10	27.00	30.85
11	30.00	33.85
12	33.00	36.85

Explanation of PN.

3030J HM 1 XX - X XX

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Male Housing
- ③ Option Type : With Mounting Ear
- ④ Circuits No.
- ⑤ Insulator Material : 2 : Nylon66, UL 94-V2
3 : Nylon66, UL 94-V0
- ⑥ Color : BK : Black

Specification :

Current Rating : 5A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1500V AC/minute

Insulator Material : Nylon66, UL 94-V2 or
Nylon66, UL 94-V0

ASIAS TECHNOLOGY CO.,LTD.
DESCRIPTION :
 3.00mm Pitch, Housing,
 Single row, Male Type,
 With Mounting Ear

PART NO. :
 3030JHM1XX-XBK
GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

