
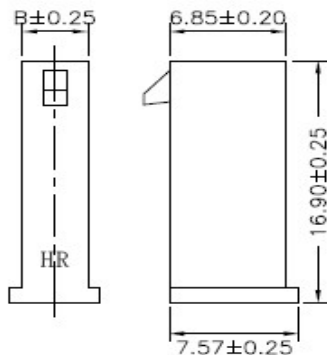
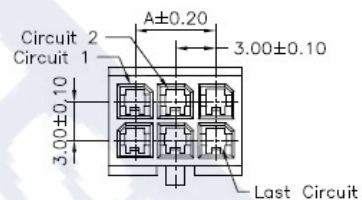



RoHS


Reach

Ordering Information & Dimension


Circuits No.	Dimensions		Circuits No.	Dimensions		Circuits No.	Dimensions	
	A	B		A	B		A	B
02	----	3.85	10	12.00	15.85	18	24.00	27.85
04	3.00	6.85	12	15.00	18.85	20	27.00	30.85
06	6.00	9.85	14	18.00	21.85	22	30.00	33.85
08	9.00	12.85	16	21.00	24.85	24	33.00	36.85



02P

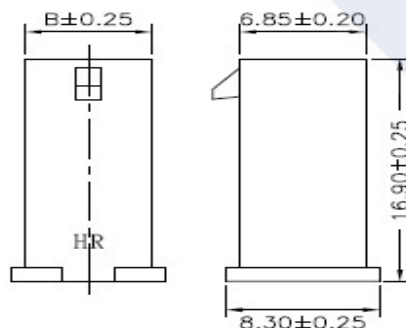

04P



06P ~ 24P

Explanation of PN.

3030J HM D XX - X XX

① ② ③ ④ ⑤ ⑥

- ① Series No.
 ② Connector Type : Male Housing
 ③ Row Type : Dual Row
 ④ Circuits No.
 ⑤ Insulator Material : 2 : Nylon66, UL 94-V2
 3 : Nylon66, UL 94-V0
 7 : Nylon66, UL 94-V2(No Flame)
 ⑥ Color : BK : Black -- Nylon66, UL 94-V2
 BK : Black -- Nylon66, UL 94-V0
 NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)

Specification :

- Current Rating : 5A AC,DC
 Voltage Rating : 250V AC,DC
 Temperature Range : -25°C ~ +85°C
 Contact Resistance : 10mΩ Max.
 Insulation Resistance : 1000mΩ Min.
 Withstanding Voltage : 1500V AC/minute
 Insulator Material : Nylon66, UL 94-V2 or
 Nylon66, UL 94-V0 or
 Nylon66, UL 94-V2(No Flame)

DESCRIPTION :
 3.00mm Pitch, Housing,
 Dual row, Male Type,
 Without Mounting Ear

PART NO. :
 3030JHMDXX-XXX

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

