

RoHS

Reach

Explanation of PN.


**4500J HF D XX - 3 WH**

① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② Connector Type : Female Housing
- ③ Row Type : Dual Row
- ④ Circuits No.
- ⑤ Insulator Material : Nylon66, UL 94-V0
- ⑥ Color : White

Specification :

- Current Rating : 10A AC,DC
- Voltage Rating : 300V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 7mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Insulator Material : Nylon66, UL 94-V0

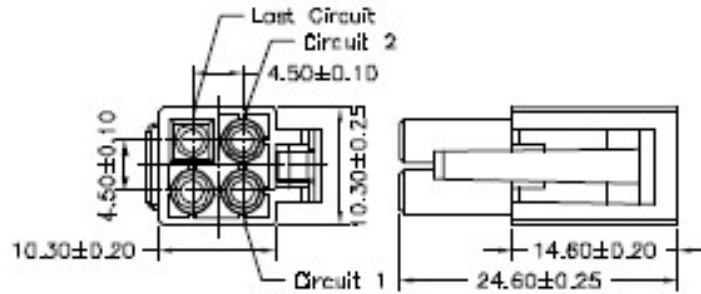


4500JHFD04-3WH

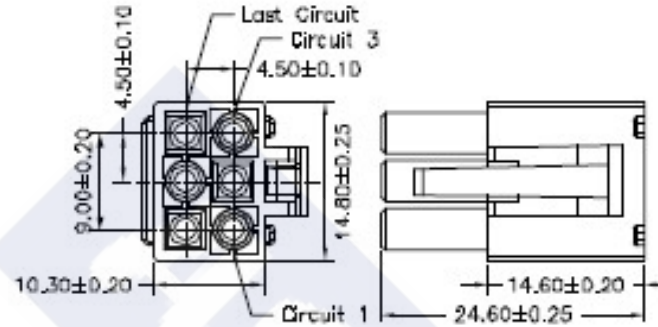

4500JHFD06-3WH

Ordering Information :

There is only 04 and 06 positions products.

	<b>DESCRIPTION :</b> <b>4.50mm Pitch, Housing, Dual row, Female Type</b>	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> <b>4500JHFDXX-3WH</b>	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 