

RoHS


Reach

Explanation of PN.


4500J HM XX - 3 WH

① ② ③ ④ ⑤


- ① Series No.
- ② Connector Type : Male Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : White

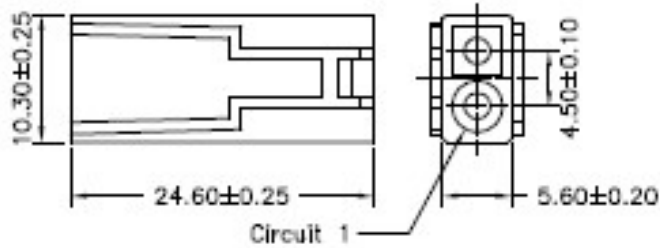

4500JHM02-3WH

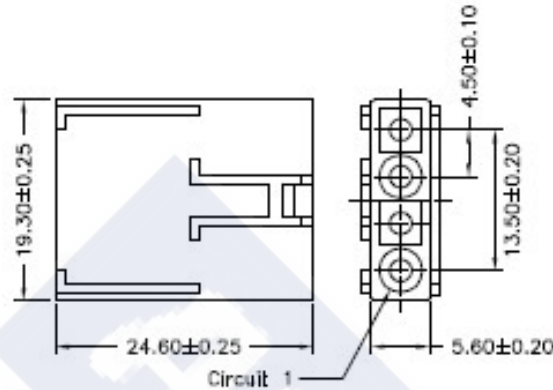

4500JHM04-3WH

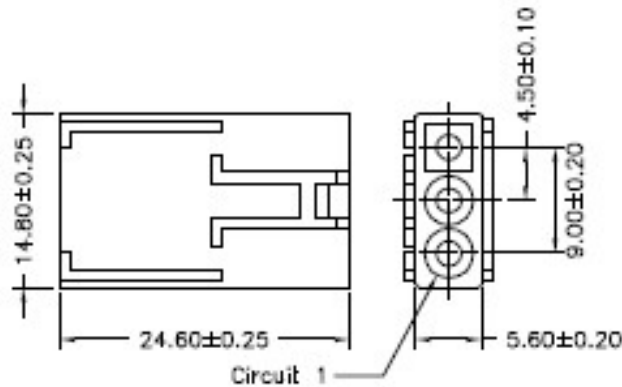

4500JHM03-3WH

Ordering Information :

There is only 02, 03 and 04 positions products.

Specification :

- Current Rating : 10A AC,DC
- Voltage Rating : 300V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 7mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Insulator Material : Nylon66, UL 94-V0

	DESCRIPTION : 4.50mm Pitch, Housing, Single row, Male Type, Without Mounting Ear	GENERAL TOLERANCE	
	PART NO. : 4500JHMXX-3WH	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free