


RoHS

Reach

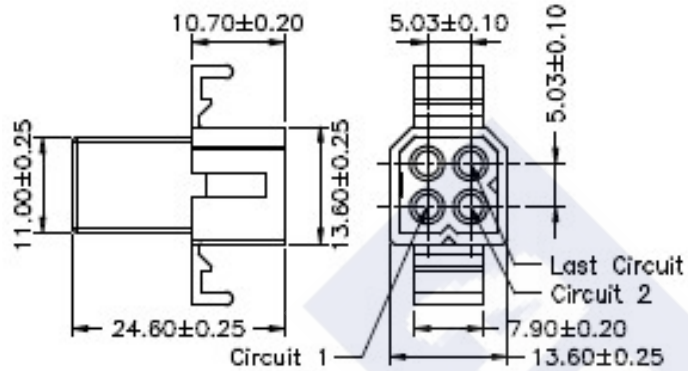

5030HM1D04-XNL

## Ordering Information :

1. There is only 04 positions products
2. The product without the mounting ear is also available and the part number is **5030JHMDXX-XNL**.

Explanation of PN.


**5030J HM 1 D XX - X NL**

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Male Housing
- ③ Option Type : With Mounting Ear
- ④ Row Type : Dual Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 2: Nylon66, UL 94-V2  
7: Nylon66, UL 94-V2(No Flame)
- ⑦ Color : Natural(Translucent)

## Specification :

Current Rating :	12A AC,DC
Voltage Rating :	250V AC,DC
Temperature Range :	-25°C ~ +85°C
Contact Resistance :	10mΩ Max.
Insulation Resistance :	1000mΩ Min.
Withstanding Voltage :	1500V AC/minute
Insulator Material :	Nylon66, UL 94-V2 or Nylon66, UL 94-V2 (No Flame)

	<b>DESCRIPTION :</b> <b>5.03mm Pitch, Housing,</b> <b>Dual row, Male Type,</b> <b>With Mounting Ear</b>	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> <b>5030JHM1DXX-XNL</b>	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 